

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problems Mailbox.**

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
9 March 2000 (09.03.2000)

PCT

(10) International Publication Number  
**WO 00/12163 A3**

(51) International Patent Classification<sup>7</sup>: A61M 15/00,  
B65D 83/14, C08L 65/04

(21) International Application Number: PCT/GB99/01961

(22) International Filing Date: 22 June 1999 (22.06.1999)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
9818644.8 26 August 1998 (26.08.1998) GB

(71) Applicant (for all designated States except US): **BESPAK PLC** [GB/GB]; Bergen Way, North Lynn Industrial Estate, King's Lynn, Norfolk PE30 2JJ (GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **BARNES, Paul**

[GB/GB]: 15 Graham Drive, Fair Green, Middleton, King's Lynn, Norfolk, PE32 1RL (GB). **LECHNER, Marc** [GB/GB]; 182 Sutton Road, Terrington St. Clement, King's Lynn, Norfolk PE34 4EX (GB). **WARBY, Richard, John** [GB/GB]; 93 Church Road, Emneth, Wisbech, Cambridgeshire PE14 8AF (GB).


(74) Agent: **BOULT WADE TENNANT**; Verulam Gardens, 70 Gray's Inn Road, London WC1X 8BT (GB).

(81) Designated States (*national*): AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM,

[Continued on next page]

(54) Title: IMPROVEMENTS IN DRUG DELIVERY DEVICES

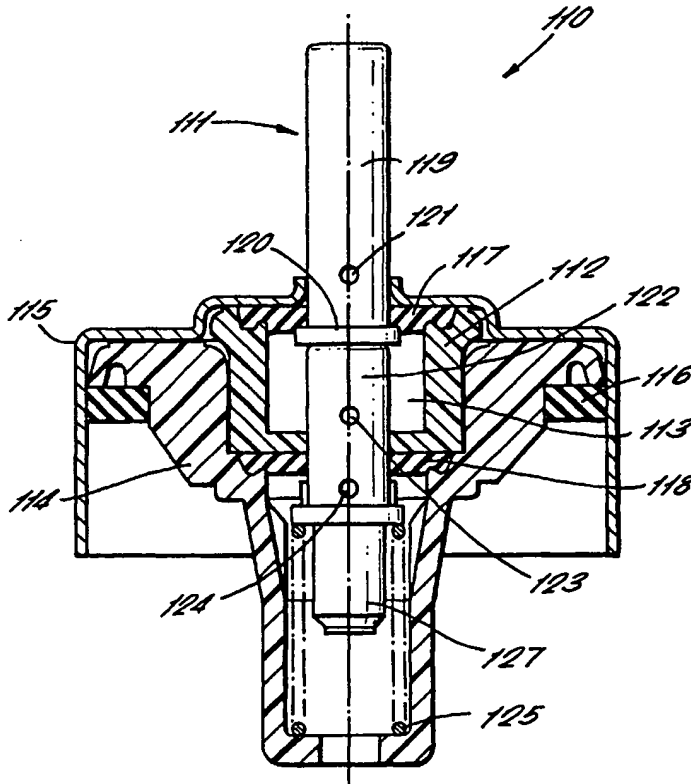

(57) Abstract: The invention relates to improvements to drugs delivery devices, in particular, those for dispensing a metered dose of medicament. There is provided apparatus (10, 110) for dispensing a medicament wherein at least a portion of one or more of the surfaces of components of the apparatus which come into contact with the medicament during storage or dispensing has a layer of a poly-para-xylylene polymer also known as parylene bonded to at least a portion thereof.



AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

(88) Date of publication of the international search report:  
10 May 2001

**Published:**

— With international search report.

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

# INTERNATIONAL SEARCH REPORT

International Application No

PC1/GB 99/01961

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 A61M15/00 B65D83/14 C08L65/04

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A61M B65D C08L C08J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	FR 2 756 502 A (OREAL) 5 June 1998 (1998-06-05) claims	1-3,5,14
X	US 5 000 994 A (ROMBERG VAL G ET AL) 19 March 1991 (1991-03-19) abstract	1-3
X	WO 95 15777 A (SURVIVAL TECHNOLOGY) 15 June 1995 (1995-06-15) abstract	1-4
A	FR 2 740 527 A (VALOIS) 30 April 1997 (1997-04-30) abstract	1,7

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

15 October 1999

Date of mailing of the international search report

25/10/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Villeneuve, J-M

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 99/01961

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
FR 2756502 A	05-06-1998	NONE	
US 5000994 A	19-03-1991	US 4808453 A	28-02-1989
		US 4973504 A	27-11-1990
		AT 90375 T	15-06-1993
		AU 599477 B	19-07-1990
		AU 1459088 A	13-10-1988
		CA 1330640 A	12-07-1994
		DE 3881684 A	15-07-1993
		WO 8808012 A	20-10-1988
		DK 509489 A	13-10-1989
		EP 0346395 A	20-12-1989
		ES 2006409 A	16-04-1989
		FI 885755 A	12-12-1988
		JP 1070055 A	15-03-1989
		JP 1702909 C	14-10-1992
		JP 3058742 B	06-09-1990
		AT 101832 T	15-03-1994
		DE 58907035 D	31-03-1994
		EP 0368103 A	16-05-1990
WO 9515777 A	15-06-1995	US 5354286 A	11-10-1994
		AU 1289495 A	27-06-1995
		EP 0732950 A	25-09-1996
		IL 111900 A	13-07-1997
FR 2740527 A	30-04-1997	DE 69603872 D	23-09-1999
		EP 0858420 A	19-08-1998
		WO 9716360 A	09-05-1997



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification: <b>A61M 15/00</b>	<b>A2</b>	(11) International Publication Number: <b>WO 00/12163</b> (43) International Publication Date: 09 March 2000 (09.03.2000)
(21) International Application Number: PCT/GB99/01961 (22) International Filing Date: 22 June 1999 (22.06.1999) (30) Priority Data: 9818644.8 26 August 1998 (26.08.1998) GB (60) Parent Application or Grant BESPAK PLC [/]; O. BARNES, Paul [/]; O. LECHNER, Marc [/]; O. WARBY, Richard, John [/]; O. BARNES, Paul [/]; O. LECHNER, Marc [/]; O. WARBY, Richard, John [/]; O. BOULT WADE TENNANT; O.	<b>Published</b>	
<p>(54) Title: IMPROVEMENTS IN DRUG DELIVERY DEVICES (54) Titre: PERFECTIONNEMENTS APPORTES A DES DISPOSITIFS D'ADMINISTRATION DE MEDICAMENTS</p> <p>(57) Abstract</p> <p>The invention relates to improvements to drugs delivery devices, in particular, those for dispensing a metered dose of medicament. There is provided apparatus (10, 110) for dispensing a medicament wherein at least a portion of one or more of the surfaces of components of the apparatus which come into contact with the medicament during storage or dispensing has a layer of a poly-para-xylylene polymer also known as parylene bonded to at least a portion thereof.</p> <p>(57) Abrégé</p> <p>L'invention concerne des perfectionnements apportés à des dispositifs d'administration de médicaments, en particulier, à des dispositifs d'administration d'une quantité dosée d'un médicament. L'invention concerne en conséquence un appareil d'administration d'un médicament (10, 110), caractérisé en ce qu'au moins une partie d'une ou de plusieurs des surfaces des composants de l'appareil venant en contact avec le médicament durant l'entreposage ou l'administration présente une couche d'un polymère poly-para-xylylène, également connu sous la désignation de _ parylène _, liée à au moins une partie de la surface.</p>		

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>7</sup> : A61M 15/00		A2	(11) International Publication Number: WO 00/12163
			(43) International Publication Date: 9 March 2000 (09.03.00)
(21) International Application Number: PCT/GB99/01961		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SI, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 22 June 1999 (22.06.99)			
(30) Priority Data: 9818644.8 26 August 1998 (26.08.98) GB			
(71) Applicant (for all designated States except US): BESPAC PLC [GB/GB]; Bergen Way, North Lynn Industrial Estate, King's Lynn, Norfolk PE30 2JJ (GB).			
(72) Inventors; and (75) Inventors/Applicants (for US only): BARNES, Paul [GB/GB]; 15 Graham Drive, Fair Green, Middleton, King's Lynn, Norfolk, PE32 1RL (GB). LECHNER, Marc [GB/GB]; 182 Sutton Road, Terrington St. Clement, King's Lynn, Norfolk PE34 4EX (GB). WARBY, Richard, John [GB/GB]; 93 Church Road, Emneth, Wisbech, Cambridgeshire PE14 8AF (GB).			
(74) Agent: BOULT WADE TENNANT; 27 Fumival Street, London EC4A 1PQ (GB).		Published Without international search report and to be republished upon receipt of that report.	

(54) Title: IMPROVEMENTS IN DRUG DELIVERY DEVICES

(57) Abstract

The invention relates to improvements to drugs delivery devices, in particular, those for dispensing a metered dose of medicament. There is provided apparatus (10, 110) for dispensing a medicament wherein at least a portion of one or more of the surfaces of components of the apparatus which come into contact with the medicament during storage or dispensing has a layer of a poly-para-xylylene polymer also known as parylene bonded to at least a portion thereof.

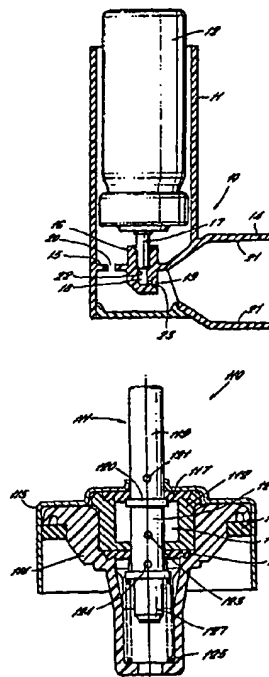

*FOR THE PURPOSES OF INFORMATION ONLY*

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KK	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		



Description

5

10

15

20

25

30

35

40

45

50

55

5

IMPROVEMENTS IN DRUG DELIVERY DEVICES

10

This invention relates to improvements in drug delivery devices and particularly those for dispensing a metered dose of a medicament.

15

In metered dose inhalers, an aerosol stream from a pressurised dispensing container is fired towards a patient or user of the inhaler into an air flow. The air flow is created by a user inhaling through a mouthpiece of the inhaler and the medicament is released into this air flow at a point between the air inlet holes and the mouthpiece.

20

25

Conventional metering valves for use with pressurised dispensing containers comprise a valve stem coaxially slidable within a valve member defining an annular metering chamber, and outer and inner annular seals operative between the respective outer and inner ends of the valve stem and the valve member to seal the metering chamber therebetween. The valve stem is hollow whereby in a non-dispensing position of the valve stem, the metering chamber is connected to the container and charged with product therefrom. The valve stem is movable against the action of a spring to a dispensing position wherein the metering chamber is isolated from the container and vented to atmosphere for the discharge of product.

30

35

40

Other drug delivery devices include apparatus in which capsules containing a powdered medicament are mechanically opened at a dispensing station where inhaled air subsequently entrains the powder, which is then dispensed through a mouthpiece.

45

50

A problem with all such drug delivery devices is that deposition of the medicament, or a solid component from a suspension of a particulate product in a liquid propellant, on the internal surfaces and

55

5

- 2 -

10

other components of the devices occurs after a number of operation cycles and/or storage. This can lead to reduced efficiency of operation of the device and of the resulting treatment in that deposition of the product reduces the amount of active drug available to be dispensed.

15

5

20

10

Some prior art devices rely on the dispenser being shaken in an attempt to dislodge the deposited particles as a result of the movement of a liquid propellant and product mixture. However, whilst this remedy is effective within the body of the container itself, it is not effective for particles deposited on the inner surfaces of the metering chamber. As the size of the chamber is significantly smaller, the restricted flow of fluid in the metering chamber (caused by the tortuosity of the flow path through the chamber) means that the fluid in the metering chamber does not move with enough energy to adequately remove the deposited particles.

25

15

30

20

One solution is proposed in our pending application GB 9721684.0 in which a liner of a material such as fluoropolymer, ceramic or glass is included to line a portion of the wall of a metering chamber in a metering valve. Although this solves the problem of deposition in these types of dispensers, it does require the re-design or modification of mouldings and mould tools for producing the valve members to allow for the insertion of the liner.

35

25

40

45

30

It is an object of the present invention to provide drug delivery devices in general in which the deposition of the product and active drug component is minimised.

50

35

According to the invention there is provided apparatus for dispensing a medicament wherein at least a portion of one or more of the surfaces of components

55

5

10

of the apparatus which come into contact with medicament during storage or dispensing has a layer of a poly-para-xylylene polymer also known as Parylene bonded to at least a portion thereof.

15

5 A particular embodiment of the present invention will now be described, by way of example only, with reference to the accompanying drawings in which;

20

10 Fig. 1 is a cross-sectional view through an inhaler, which is one type of drug delivery device of the present invention; and

25

15 Fig. 2 is a cross sectional view of a metering valve used in another type of drug delivery device.

30

20 In Fig. 1 an inhaler 10 for a product such as a medicament comprises a housing 11 for receiving a pressurised dispensing container 12 of a medicament and a mouthpiece 14 for insertion into the mouth of a user of the inhaler 10.

35

25 The container housing 11 is generally cylindrical and open at its upper end. A lower wall 15 of the housing 11 includes an annular socket 16 for receiving the tubular valve stem 17 of the container 12. The socket 16 communicates via a duct 18 ending in an orifice 19 with the mouthpiece 14. The lower wall 15 also has holes 20 for allowing air to flow through the container housing 11 into the mouthpiece 14.

40

45

30 The mouthpiece 14 may be generally circular or shaped to fit the mouth and is connected to or forms a part of the housing 11.

50

35 In use, a patient or user holds the inhaler 10, usually in one hand, and applies his mouth to the mouthpiece 14. The user then inhales through the mouthpiece 14 and this creates an airflow through the

55

5

10

15

20

25

30

35

40

45

50

55

cylindrical housing 11, from its open end around the dispensing container 12, through the holes 20 and into the mouthpiece 14. After the user has started inhaling through the mouthpiece 14, the container 12 is depressed downwardly onto its stem 17 to release a dose of medicament from the container 12. The dose of medicament is projected by the pressure in the container 12 via the duct 18 and through the orifice 19. It then mixes with the airflow through the mouthpiece 14 and is hence inhaled by the user.

In traditional inhalers, all of the components are plastic mouldings, which gives rise to the deposition problems described above. The particular problem areas in devices such as inhalers are the internal surfaces 21 of the mouthpiece 14, the internal surfaces 22 of the duct 18 and the walls 23 defining the orifice 19. In some inhalers 10, the diameter of at least a part of the duct 18 can be as little as 0.5mm and so any deposition on its internal surfaces 22 could lead to not only the problem of a reduction in active drug components being available, but also dispensing difficulties.

The metering valve 110 illustrated in Fig. 2 is another type of drug delivery device or dispenser, and includes a valve stem 111 which protrudes from and is axially slidable within a valve member 112, the valve member 112 and valve stem 111 defining therebetween an annular metering chamber 113. The valve member 112 is located within a valve body 114 which is positioned in a pressurised container (not shown) containing a product to be dispensed. The metering valve 110 is held in position with respect to the container by means of a ferrule 115 crimped to the top of the container and sealing being provided between the valve body 114 and container by an annular gasket 116.

5

- 5 -

10

15

20

25

30

35

40

45

50

55

An outer seal 117 and an inner seal 118 of an elastomeric material extend radially between the valve stem 111 and the valve member 112. The outer seal 117 is radially compressed between the valve member 112 and valve stem 111 so as to provide positive sealing contact, the compression being achieved by using a seal which provides an interference fit on the valve stem 111 and/or by the crimping of the ferrule 115 onto the pressurised container during assembly.

10 The valve stem 111 has an end 119 which protrudes from the valve member 112 and ferrule 115 which is a hollow tube and which is closed off by flange 120 which is located within the metering chamber 113. The hollow end 119 of valve stem 111 includes a discharge port 121 extending radially through the side wall of the valve stem 111. The valve stem 111 further has an intermediate section 122, which is also hollow and defining a central passage and which has a pair of spaced radial ports 123, 124 which are interconnected through a central cavity.

A spring 125 extends between a second flange 126, separating the intermediate section 122 of the valve stem 111 and an inner end 127 of the valve stem 111, and an end of the valve body 114 to bias the valve stem 111 in a non-dispensing position in which the first flange 120 is held in sealing contact with the outer seal 117. The second flange 126 is located outside the valve member 112, but within the valve body 114.

30 The metering chamber 113 is sealed from the atmosphere by the outer seal 117, and from the pressurised container to which the valve 110 is attached by the inner seal 118. In the illustration of the valve 110 shown in Fig. 2 radial ports 123, 124 together with the central cavity in the intermediate

5

- 6 -

10

section 122 of the valve member 111 connect the metering chamber 113 with the container so that in this non-dispensing condition the metering member 113 will be charged with product to be dispensed.

15

5 Upon depression of the valve stem 111 relative to the valve member 112 so that it moves inwardly into the container, the radial port 124 is closed off as it passes through the inner seal 118, thereby isolating the metering chamber 113 from the contents of the  
10 pressurised container. Upon further movement of the valve stem 111 in the same direction to a dispensing position the discharge port 121 passes through the outer seal 117 into communication with the metering chamber 113. In this dispensing position the product  
15 in the metering chamber 113 is free to be discharged to the atmosphere via the discharge port 121 and the cavity in the hollow end 119 of the valve stem 111.

30

When the valve stem 111 is released, the biasing of the return spring 125 causes the valve stem 111 to  
20 return to its original position. As a result the metering chamber 113 becomes recharged in readiness for further dispensing operations.

35

40

The component parts of conventional drug dispensing devices, such as valve members, valve  
25 stems, inhaler housings and so on, are generally formed as single mouldings from material such as acetal, polyester or nylon which are prone to the deposition problems described above. Although in some cases it might be possible to include a separate liner  
45 of a material such as a fluoropolymer, ceramic or glass to line a portion of the area in which deposition problems occurs, this requires the re-design or modification of mouldings and mould tools so that the components can accommodate such lines.


50

35 In the present invention we propose a solution in

55

which the component parts of the drug dispensing devices are made by conventional tooling and moulds from the traditional materials listed above. They are then coated with a thin layer of a polymer from the poly-para-xylylene family, also known as the Parylene family, preferably using a Vapour Deposition Polymerisation (VDP) technique. Whilst the poly-para-xylylene polymer may be applied by spray coating or dipping, VDP has the advantage that the poly-para-xylylene coating is formed spontaneously on the component parts at or near room temperatures. Thus thermoplastic materials such as polybutyrene terephthalate (PBT), nylon, acetal and tetrabutylene terephthalate (TBT) can be treated without fear of thermal damage.

It has been found that coating the surface of component parts with Parylene significantly reduces the deposition of active drugs on the relevant surfaces due to factors such as high conformity, absence of pinholes and coefficients of static and dynamic friction between 0.25 and 0.35 giving good friction reduction. Parylene exists in three variants, commonly referred to as Parylene N, Parylene C and Parylene D, as shown below.

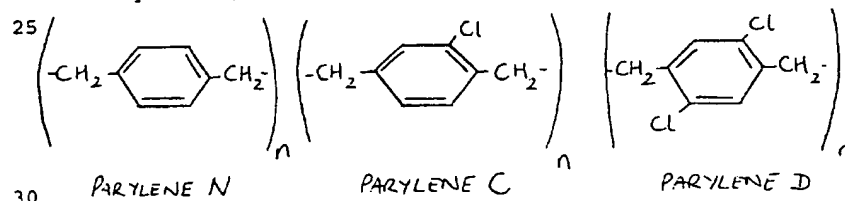

Parylene N has been found to exhibit the best anti-frictional properties (coefficient of static friction 0.25, coefficient of dynamic friction 0.25) and is thus preferred in use over Parylene C and D



5

- 8 -

where low friction is important.

10

Either an entire component within the drug delivery device, or just the surfaces of one or more component which would come into contact with the

5 medicament during actuation, could be treated to provide an improved drug delivery device according to the present invention. In the case of the type of inhalers as shown in Fig. 1, surfaces 21, 22 and 23 may be treated. In a typical dry powder inhaler, the

15

20

10

inner surface of the mouthpiece and any channel leading to the mouthpiece from the point of powder storage, i.e. from a capsule, bulk storage chamber or a pre-metered chamber of a device. In the metering

25

15

valve of Figure 2, the valve member 112 alone may be treated. However additional benefits can be achieved in treating some or all of the other plastic and rubber parts of the valve, including, for example, the valve body 114 and the seals 116, 117 and 118. In addition, the metal parts exposed to the drug

30

20

formulation may also be treated, for example, the dispensing container 12, the spring 125 or the ferrule 115. The method can also be used to treat

35

components of many other delivery devices including nasal pumps, non-pressurised actuators, foil storage types, breath actuated inhaler devices and breath co-ordinating devices and so on.

25

40

45

50

55

**Claims**

5

10

15

20

25

30

35

40

45

50

55

5

- 9 -

10

CLAIMS:

15

- 5 1. Apparatus for dispensing a medicament wherein at least a portion of one or more of the surfaces of components of the apparatus which come into contact with medicament during storage or dispensing has a layer of a poly-para-xylylene polymer also known as Parylene bonded to at least a portion thereof.

20

- 10 2. Apparatus as claimed in claim 1 in which the polymer is one of Parylene C, Parylene N or Parylene D.

25

- 15 3. Apparatus as claimed in claim 1 or claim 2 in which the treated portion is made from a plastic polymer or synthetic rubber.

30

- 20 4. Apparatus as claimed in claim 1 or claim 2 in which the treated portion is made from a metal or alloy.

35

- 25 5. Apparatus as claimed in any one of the preceding claims in which the apparatus comprises a housing adapted to receive a container for storing the medicament, a mouthpiece and duct means connecting an outlet of the container with the mouthpiece, and at least a portion of one or more of the internal surfaces of the duct and/or mouthpiece is treated.

40

45

- 30 6. Apparatus as claimed in claim 5 in which at least a portion of the surfaces of the duct and the mouthpiece have a layer of poly-para-xylylene polymer bonded thereto.

50

- 35 7. Apparatus as claimed in any one of claims 1 to 4

55

5

- 10 -

10

in which the apparatus is a metering valve for use with a pressurised dispensing container, the valve comprising a valve stem co-axially slidable within a valve member, said valve member and valve stem defining an annular metering chamber, outer and inner annular seals operative between the respective outer and inner ends of the valve member and the valve stem to seal the annular metering chamber therebetween, wherein at least a portion of the metering valve is treated to have a layer of a poly-para-xylylene polymer bonded to at least a portion of an internal surface of the metering chamber.

15

5

20

10

25

15

8. Apparatus as claimed in claim 7 in which at least a portion of the surface of the valve member has the layer of poly-para-xylylene polymer bonded thereto.

30

20

9. Apparatus as claimed in claim 7 or claim 8 in which at least a portion of the surface of the valve stem or inner end has the layer of poly-para-xylylene polymer bonded thereto.

35

25

10. Apparatus as claimed in any one of claims 7 to 9 in which at least a portion of the surface of the seals have the layer of poly-para-xylylene polymer bonded thereto.

40

45

30

11. Apparatus as claimed in any one of claims 7 to 10 in which the valve further comprises a valve body in which the valve member is located, the valve body having the layer of poly-para-xylylene polymer bonded to at least a portion of its surface.

50

35

12. Apparatus as claimed in any one of claims 7 to 11 further comprising a gasket extending between the

55

5

10

sealing surfaces of the metering valve and a  
pressurised dispensing container, said gasket having  
the layer of poly-para-xylylene polymer bonded to at  
least a portion of the surface thereof.

5

15

13. Apparatus as claimed in any preceding claim  
wherein the internal surfaces of components are coated  
with the poly-para-xylylene polymer by vapour  
deposition polymerisation.

20

10

14. Apparatus substantially as hereinbefore described  
with reference to and as shown in the accompanying  
drawings.

25

30

35

40

45

50

55

FIG. 1

